

# FDS Fibers


**Material:** Fluorine Doped Fused Silica (FDS)

**Characteristics:** Low OH. Performs good in UV spectrum, but better in the IR.

**Specifications:**

Numerical Aperture NA:	0.22 (+/- .02)
Acceptance angle:	25° (+/- 2°)
Fiber diameter (µm):	240
Bundle length:	Quoted

**Spectral Transmission for 1 M Bundle, Fiber Type FDS Low OH**

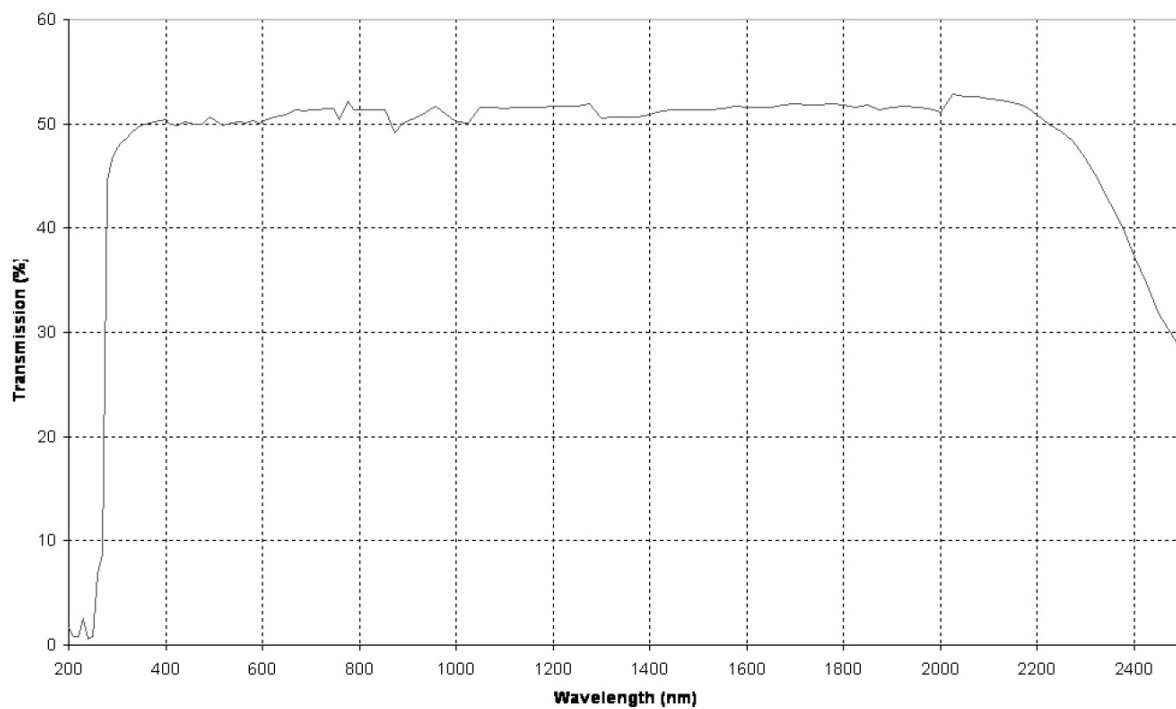

# FDS Fibers


Product improvements may result in specification or feature changes without notice.

**Material:** Fluorine Doped Fused Silica (FDS)

**Characteristics:** High OH. Performs best in the UV spectrum.

<b>Specifications:</b>	Numerical Aperture NA:	0.22 (+/-0.02)
	Acceptance angle:	25° (+/-2°)
	Fiber diameter (µm):	107, 240
	Bundle length:	Quoted

**Spectral Transmission for 1 M Bundle, Fiber Type FDS High OH**

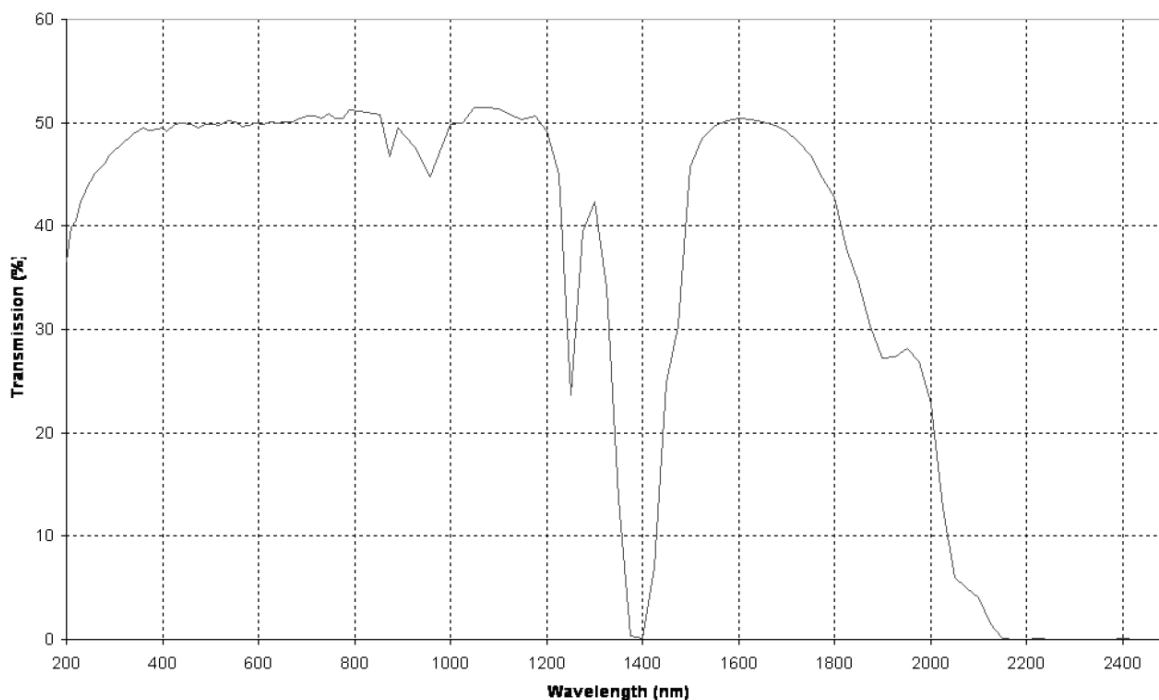

Fiber Optics

**SCHOTT AG**

Otto-Schott-Str. 2

55127 Mainz

Germany

Phone: +49 (0) 6131/66-7752

Fax: +49 (0) 6131/66-7850

E-mail: [fiberoptics.info@schott.com](mailto:fiberoptics.info@schott.com)

[www.schott.com/fiberoptics](http://www.schott.com/fiberoptics)

**SCHOTT**  
glass made of ideas