


FLEXIBLE ENDOSCOPES-STANDARD RANGE

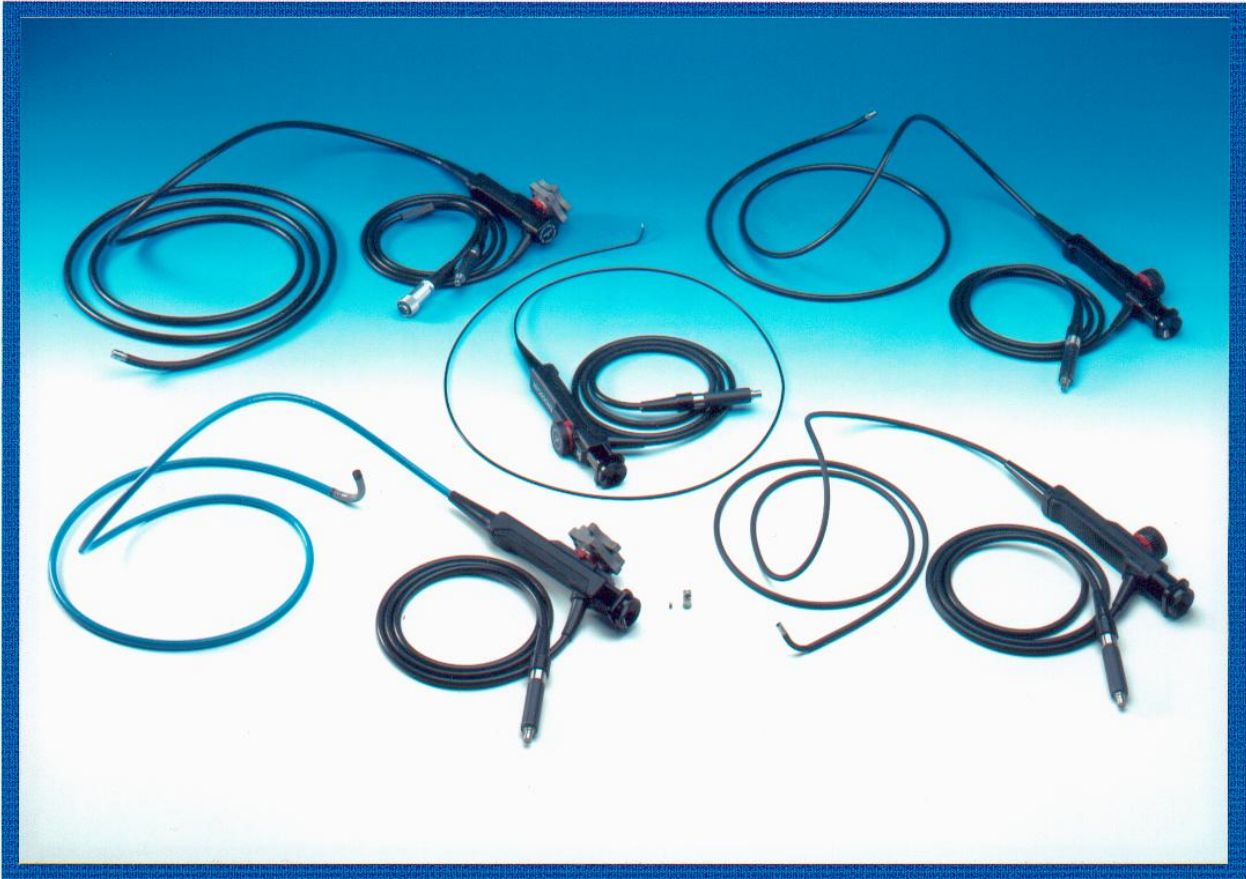

Key Features:

- Ergonomic handgrip and controls allowing one handed operation
- Fully flexible insertion shaft. Impervious to most industrial fluids, fuels and water
- Crush resistant *Endoflex* vertebrae inner core
- Tough polymer outer sheathing with *Viton* covered tip bending section
- Range of fully interchangeable, safety double locking viewing tips
- Star-wheel or button wheel 4-way remote tip angulation $\pm 120^{\circ}$ up/down/left/right
- Angulation locking with safety clutch override
- Diopter focus control. Object depth 10mm-infinity
- Integral 1.5 metre high intensity white light fibre-optic lightguide
- BS/ACMI male lightsource connector. Adapters to suit most makes of lightsources
- Designed for heavy duty use with minimal regular servicing
- Supplied in black fitted flight case.

STANDARD FLEXIBLE ENDOSCOPE RANGE:

Designed and manufactured in the UK. by ENDOSCAN Ltd

DIA MM	WORKING LENGTH MM	FIELDS OF VIEW ⁰	DIRECTION OF VIEW ⁰	INTERCHANGEABLE VIEWING TIPS	2-WAY+/-120 ⁰ ANGULATION	4-WAY+/-120 ⁰ ANGULATION
4.50	400 660 1050 1500 1750	50 ⁰	0 ⁰ /90 ⁰	X	X	
6.00	660 1050 1350 1850 *2950	30 ⁰ /60 ⁰ /100 ⁰	0 ⁰ /90 ⁰	X		X
8.00	1050 1350 1850 *2950	60 ⁰	0 ⁰			X
8.00	1050 1350 1850 *2950	30 ⁰ /60 ⁰ /100 ⁰	0 ⁰ /90 ⁰	X		X
10.00	1050 1350 1850 *2950	60 ⁰	0 ⁰			X
10.00	1050 1350 1850 *2950	30 ⁰ /60 ⁰ /100 ⁰	0 ⁰ /90 ⁰	X		X
12.00	1050 1350 1850 *2950	70 ⁰	0 ⁰	Twin Retrieval Channel instrument No interchangeable viewing tip facility		X

INTERCHANGEABLE VIEWING TIPS:

TIP DIAMETER	FIELD OF VIEW ⁰	DIRECTION OF VIEW ⁰	CODE
4.5mm	50 ⁰	90 ⁰	D
6.0mm-10mm	30 ⁰ /60 ⁰ /100 ⁰	0 ⁰	D
6.0mm-10mm	30 ⁰ /60 ⁰ /100 ⁰	90 ⁰	D



Economy versions available for all standard instruments. Identical except having Quartz Fibre image guides.

*2950mm length instruments with standard glass image guides are being discontinued.

Please see separate brochure for Video Endoscopes.

Instruments with interchangeable viewing tip facility, are supplied as standard with one interchangeable forward view tip.

Custom design and manufacture service available for all Endoscan products

For further information please contact our sales office. 44(0)1258 450523.

Endoscan Marketing Ltd.

58 Acacia Road.

St Johns Wood.

London. UK. NW8. 6AG.

Telephone Direct: 44 (0)207 483 2300.

Sales: 44 (0)1258 450523. Switchboard: 44 (0)207 483 2281.

Facsimile: Direct: 44 (0)207 483 2900.

Sales: 44 (0)1258 450523.

E-mail: sales@endoscan.co.uk

Website: www.endoscan.co.uk

